

Swing Gate UKT-50



PRODUCT DATASHEET



www.UKTurnstiles.co.uk

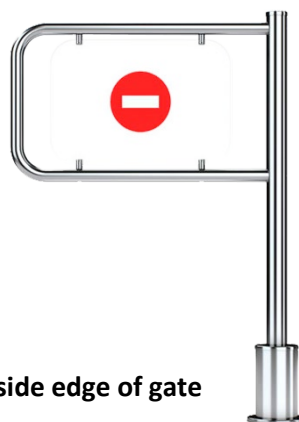
sales@UKTurnstiles.co.uk

01293 350666

The UKT-50 Swing gate is a non-powered mechanical unit that is designed for use internally in a single direction only. The unit pushes open to 90° & then swings shut with the use of a spring closing mechanism.

Key Product Features:


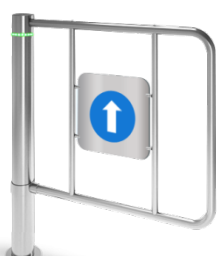



- Non-powered
- Internal Use Only
- Right or Left opening (see separate handling drawing)
- 90° single direction of opening
- Stainless steel finish
- Spring-closing mechanism
- Signage, direction arrow or no entry (optional)
- Passage width is measured from the inside post to outside edge of gate



Technical Specifications:

Description	Value	Unit of Measurement
Dimensions -	Total Size -	mm (HxDxW)
Passage width 600mm	1000x145x725	
Passage width 800mm	1000x145x925	
Passage width 1000mm	1000x145x1125	
Passage width 1200mm	1000x145x1325	
Weight	10 - 13	Kg
Temperature Range	+5 ~ +40	°C
Relative Humidity	80	%
Throughput	30	Persons / min

Additional Options:

				
UKT-51 – External Mechanical Unit with Spring Close	UKT-54 – Internal Bi-directional Electromechanical Unit	UKT-55 – External Bi-directional Electromechanical Unit	UKT-56 – Internal Motorised Glass Wing Bi-directional Unit	UKT-57 – External Motorised Bi-directional Unit